


# SAGA CAMERA ECONOMY SHEET CUTTER MACHINE

## SG-SC 30II

- CCD automatically recognizes and locates for more accuracy ;
- QR code intelligent hybrid cutting, different documents automatically recall the cutting path;
- Multiple connection modes, USB, U disk, offline, network cable, WIFI;
- Large capacity automatic feeding, holding 100 sheets of self-adhesive at once (Depend on variable material) ;
- widen the paper structure, smooth paper feeding, avoid double sheets;
- Cutstudio displays the cutting status in real time, and the software background workload and efficiency can be tracked and viewed ;
- Tool-free disassembly for ease of use and maximum space savings.



Key Board



Double-Row Paper Wheel



knife-free mold



CCD identification and positioning



QR code intelligent hybrid cutting



Multiple connection methods



High-Precision Trolley



## PRODUCT PARAMETERS :

Model name	SG-SC 30II
Cutting control system	Stepper motor
Positioning sensor type	Adaptive dimming digital camera
Scanning code type	Round marker, corner marker, QR code
Sheet feeding	Up to 100 pcs depend on variable material
Cutting precision (Patterns)	Three patterns (Speed first, Balance first, Precision first)
Sheet feeding	Up to 100 pcs depends on thickness of the paper
Sheet feeding method	Friction feed
Scanning speed	6-10s
Maximum sheet size	483mmX330mm
Maximum cutting size	473mmX325mm
Minimum cutting character	About 5mm <sup>2</sup> (Depend on variable material and graphics)
Maximum actual cutting speed	800
Maximum cutting force	500gf
Maximum paper weight	250g(Depend on variable material)
Control panel	LCD with keys
Mechanical resolution	0.09mm
Programmable resolution	HPGL 0.025mm
Package dimensions	L820mm×W680mm×H550mm
Actual dimensions	L695mm×W480mm×H340mm
Net/Gross weight	26±5kg/45±5kg
Tools	Single tool holder, with one blade and one pen
<b>Software and compatibility</b>	
Connectivity	LAN, U disk, USB
Software and compatibility	CutStudio, Corel Draw / Illustrator Plugin
<b>Power and working environment requirements</b>	
Voltages	100VAC~240VAC,3.0A 50/60 Hz
Power	150W
Operation environment	Temperature +5℃ to +35℃ (Fahrenheit 41-95) Humidity 30% -75%(Non-condensing)

## APPLICABLE MATERIALS :

Ordinary Sticker



Special Sticker

PVC

PET

This parameter is subject to change without prior notice. The company reserves the right of final interpretation

## APPLICATION DISPLAY :

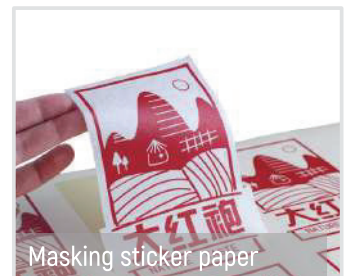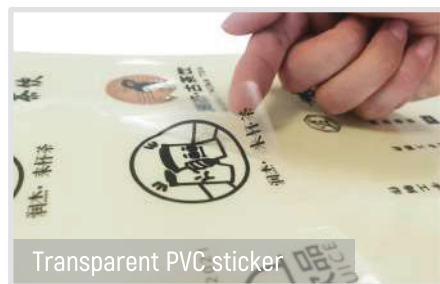

[www.guardianclt.com/home](http://www.guardianclt.com/home)

+91 8086 000 144, +91 9995 820 506

[guardianclt@gmail.com](mailto:guardianclt@gmail.com), [vipinguardian@gmail.com](mailto:vipinguardian@gmail.com)

Door No.: 52/2526, Kottarahil Parambil Building  
Lm Paily Road, Vyttila Ernakulam - 682 019

27/1525, E5, Central Arcade  
Mini bypass Road Puthiyara, Calicut, Kerala - 673004